


MODEL	DIMENSIONS													CONNECTIONS <ANSI FLANGES>	INLET AIR FLOW <scfm>	NET WEIGHT <lbs>	POWER SUPPLY	REFRIGERANT
	A	B	C	D	E	F	G	H	I	J	K	L	M					
HGEN1000	31.60 [802.7]	20.60 [523.3]	11.00 [279.4]	28.77 [729.4]	28.35 [720]	41.34 [1059]	45.28 [1150]	64.16 [1629.6]	28.44 [720]	28.35 [720]	3.35 [85]	6.59 [167.5]	38.68 [982.5]	4"	1000	744	460V/3PH/60Hz	R407c
HGEN1200	31.60 [802.7]	20.60 [523.3]	11.00 [279.4]	28.77 [729.4]	28.35 [720]	41.34 [1059]	45.28 [1150]	64.16 [1629.6]	28.44 [720]	28.35 [720]	3.35 [85]	6.59 [167.5]	38.68 [982.5]	4"	1200	744	460V/3PH/60Hz	R407c

NOTE: PRIMARY DIMENSIONS ARE INCHES
& DIMENSIONS IN BRACES ARE METRIC

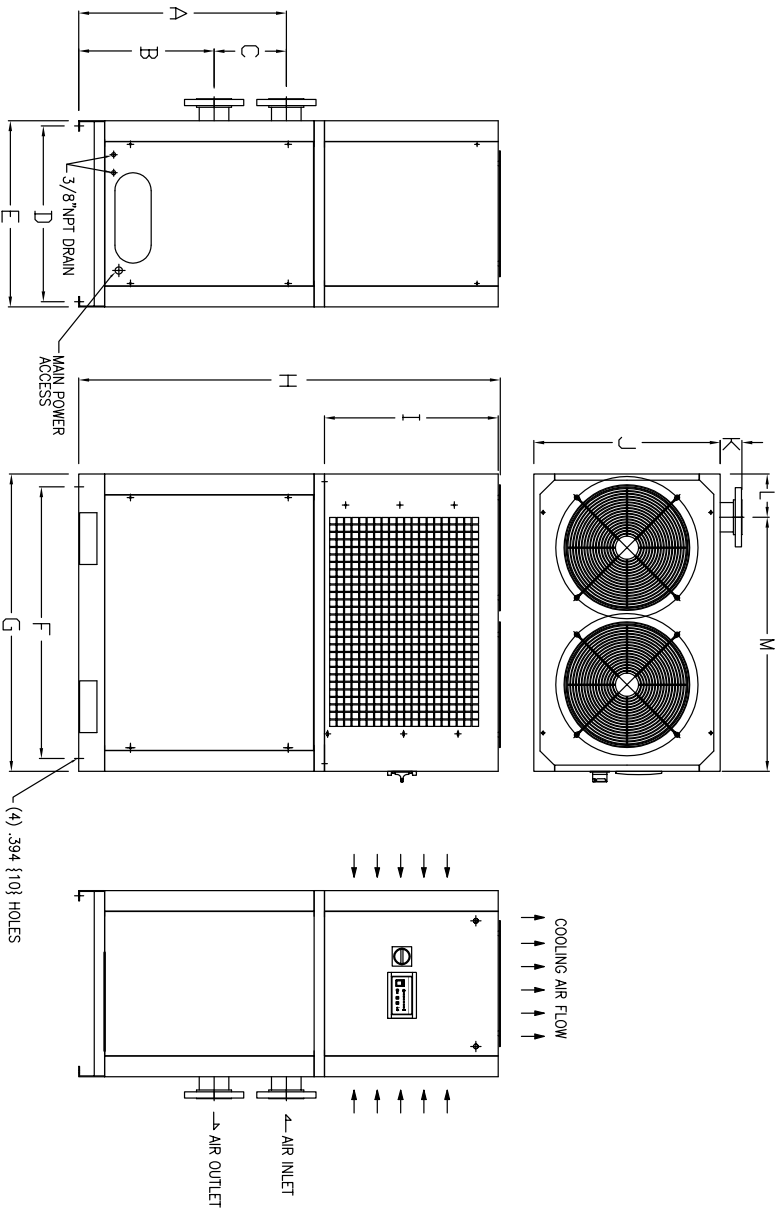

SERVICE:
COMPRESSED AIR
OPERATING CONDITIONS:
RATED INLET AIR PRESSURE - 100 PSIG
MAXIMUM INLET AIR PRESSURE - 232 PSIG
MINIMUM INLET AIR PRESSURE - 43.5 PSIG
RATED INLET AIR TEMPERATURE - 100°F
MAXIMUM INLET AIR TEMPERATURE - 120°F
MINIMUM INLET AIR TEMPERATURE - 45°F
RATED AMBIENT AIR TEMPERATURE - 86°F
MAXIMUM AMBIENT AIR TEMPERATURE - 109°F
MINIMUM AMBIENT AIR TEMPERATURE - 37°F

SPECIFICATIONS:
CONDENSER TYPE - AIR COOLED
DRAIN TYPE - ELECTRONIC AUTO DRAIN VALVE
EXPANSION DEVICE - CONSTANT PRESSURE EXPANSION VALVE



REV.	DESCRIPTION	BY	DATE	APPROVED
	REVISION HISTORY (INDICATES LATEST REVISION)			

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOL. ON FRACTIONS: ± 1/16
TOL. ON DECIMALS: ± .03 (2 PLACE)
TOL. ON DECIMALS: ± .015 (3 PLACE)
TOL. ON ANGLES: ± 1.5
THIRD ANGLE PROJECTION

DRAWN BY: NLC DATE: 2/6/17	GENERAL ARRANGEMENT
CHECKED BY: NLC DATE: 2/6/17	HGEN1000, HGEN1200 AIR COOLED
APPROVED BY: NLC DATE: 2/6/17	SIZE: B SCALE: NONE EST. WT.
	DWG. NO: GA03DEL-0058 REV.
	SHEET 10F 1