


Medical Scroll Enclosure System Dimensions (in)

Model	A	A1	B	B1	C	D	D1	E	E1	F	Inlet	Outlet
MSED100	37.5	43.6	29.4	31.5	61.2	79.0	79.2	32.0	35.9	68.4	1"	¾"
MSED150	37.5	46.4	29.4	36.4	61.2	79.0	81.7	32.0	35.9	77.3	1 ½"	¾"
MSED200	37.5	46.4	29.4	36.4	61.2	79.0	85.3	32.0	35.9	77.3	1 ½"	1"

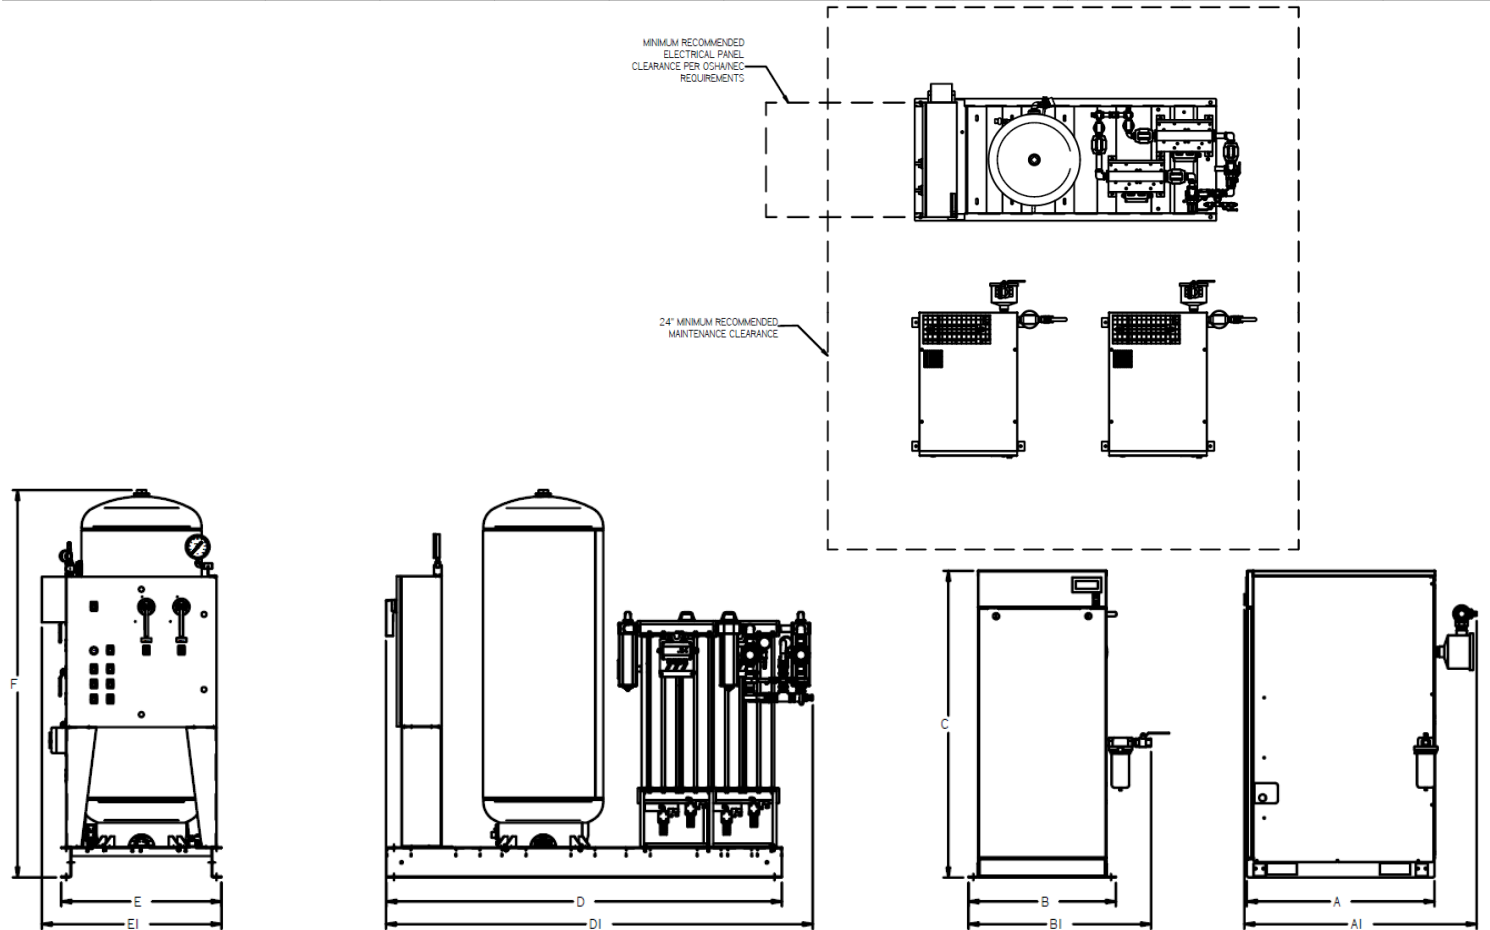

Medical Scroll Enclosure System Specifications

Model	HP ⁽¹⁾	SCFM @ 100 PSIG ⁽³⁾	SCFM @ 50 PSIG ⁽³⁾	Tank (gal)	BTU/Hr ⁽²⁾	dB(A) Level ⁽⁴⁾	System F.L.A.			Weight (lbs)
							208V	230V	460V	
MSED100	10	30.5	33.2	80	25,470	53	59.6	54	28	2351
MSED150	15	45.7	49.8	80	38,205	56	88.4	80	40.9	2802
MSED200	20	61	66.4	120	50,940	58	117.2	106	53.9	3176

- Notes:
- 1 – HP is shown with one or more compressors in reserve per NFPA 99.
 - 2 – BTU/Hr levels are shown with reserve compressor(s) on standby.
 - 3 – Powerex recommends using performance ratings in SCFM (Standard Cubic Feet per Minute) when sizing medical air systems
 - 4 – dB(A) levels are shown with one compressor in reserve.
 - 5 – Minimum recommended clearance 24" around system; follow OSHA/NEC requirements at control panel.
 - 6 – 3 Year Limited Warranty.