




8-Gallon & Base-Mount

Air Compressor/ Generator Combinations

Single/Two Stage — Gasoline

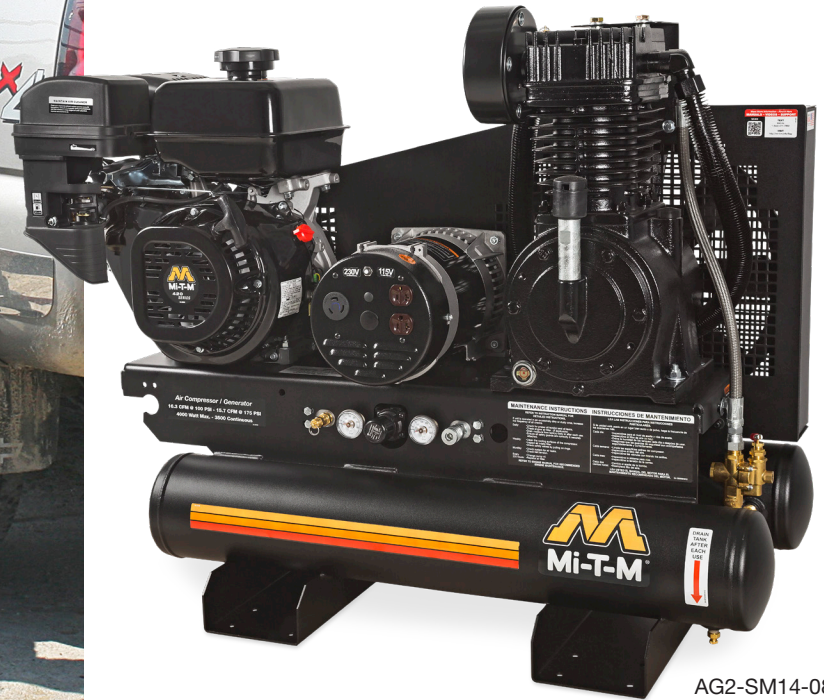

AG2-SM14-08M1

Ideal for jobsites and work trucks, the air compressor/generator combination units go a long way to increasing productivity. Operate air tools and power electrical tools anywhere.

COMPRESSOR PUMP

- Cast iron compressor pump
- Splash lubricated
- Stainless-steel braided discharge hose
- Large canister intake filter
- Oil level sight indicator

GENERATOR

- Brushless alternator
- Total harmonic distortion (THD) less than 6%
- 100% copper windings
- (2) NEMA 5-20R 120V, 20A receptacles (Single stage models)
- (2) NEMA 5-20R 120V, 20A and (1) NEMA L6-2R 240V, 20A receptacles (Two stage models)

FRAME

- Powder coated twin tank receivers (Portable and stationary models)
- $\frac{3}{16}$ -inch base plate to reduce vibration
- 16-gauge powder coated two-piece belt guard
- 13-inch flat-free tires (Two stage portable models) (10-inch tires on single stage models)

COMPONENTS

- Regulator and two gauges for tank and outlet pressure
- Manual drain valves for proper maintenance
- 12 or 16 $\frac{1}{2}$ -inch fly wheel
- Quality pilot valve unloader

LIMITED WARRANTY

- 3 year engine



8-Gallon & Base-Mount

Air Compressor/Generator Combinations – Single/Two Stage – Gasoline

SINGLE STAGE – PORTABLE MODELS

MODEL NUMBER	CFM @ PSI	CFM @ PSI	MAX. AC OUTPUT	ALTERNATOR WATTAGE		DISPLACEMENT/ENGINE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
				CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				
AG1-PH65-08M1	11.9 @ 90	10.9 @ 125	1800 watts	600 watts	1600 watts	196cc Honda GX200 OHV	44.5x26x27.5in.	257 lb.	207 lb.
AG1-PM07-08M1	11.9 @ 90	10.9 @ 125	1800 watts	600 watts	1600 watts	212cc Mi-T-M OHV	44.5x26x27.5in.	257 lb.	207 lb.

TWO STAGE – PORTABLE MODELS

MODEL NUMBER	CFM @ PSI	CFM @ PSI*	MAX. AC OUTPUT	ALTERNATOR WATTAGE		DISPLACEMENT/ENGINE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
				CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				
AG2-PH13-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	389cc Honda GX390 OHV ⁺	52x28x34in.	450 lb.	375 lb.
AG2-PH13-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	389cc Honda GX390 OHV ⁺	52x28x34in.	450 lb.	375 lb.
AG2-PK14-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	429cc Kohler CH440 OHV	52x28x34in.	450 lb.	375 lb.
AG2-PK14-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	429cc Kohler CH440 OHV	52x28x34in.	450 lb.	375 lb.
AG2-PM14-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	420cc Mi-T-M OHV	52x28x34in.	450 lb.	375 lb.
AG2-PM14-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	420cc Mi-T-M OHV	52x28x34in.	450 lb.	375 lb.
AG2-PV14-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	408cc Vanguard OHV	52x28x34in.	450 lb.	375 lb.
AG2-PV14-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	408cc Vanguard OHV	52x28x34in.	450 lb.	375 lb.

TWO STAGE – STATIONARY MODELS

MODEL NUMBER	CFM @ PSI	CFM @ PSI*	MAX. AC OUTPUT	ALTERNATOR WATTAGE		DISPLACEMENT/ENGINE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
				CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				
AG2-SH13-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	389cc Honda GX390 OHV ⁺	44x22x34in.	465 lb.	365 lb.
AG2-SH13-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	389cc Honda GX390 OHV ⁺	44x22x34in.	465 lb.	365 lb.
AG2-SK14-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	429cc Kohler CH440 OHV	44x22x34in.	465 lb.	365 lb.
AG2-SK14-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	429cc Kohler CH440 OHV	44x22x34in.	465 lb.	365 lb.
AG2-SM14-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	420cc Mi-T-M OHV	44x22x34in.	465 lb.	365 lb.
AG2-SM14-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	420cc Mi-T-M OHV	44x22x34in.	465 lb.	365 lb.
AG2-SV14-08M1	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	408cc Vanguard OHV	44x22x34in.	465 lb.	365 lb.
AG2-SV14-08M1E [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	408cc Vanguard OHV	44x22x34in.	465 lb.	365 lb.

TWO STAGE – BASE-MOUNT MODELS

MODEL NUMBER	CFM @ PSI	CFM @ PSI*	MAX. AC OUTPUT	ALTERNATOR WATTAGE		DISPLACEMENT/ENGINE	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
				CONT. WITH COMP. ON-LOAD	CONT. WITH COMP. OFF-LOAD				
AG2-SH13-B	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	389cc Honda GX390 OHV ⁺	47x22x28in.	390 lb.	325 lb.
AG2-SH13-BE [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	389cc Honda GX390 OHV ⁺	47x22x28in.	390 lb.	325 lb.
AG2-SK14-B	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	429cc Kohler CH440 OHV	47x22x28in.	390 lb.	325 lb.
AG2-SK14-BE [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	429cc Kohler CH440 OHV	47x22x28in.	390 lb.	325 lb.
AG2-SM14-B	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	420cc Mi-T-M OHV	47x22x28in.	390 lb.	325 lb.
AG2-SM14-BE [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	420cc Mi-T-M OHV	47x22x28in.	390 lb.	325 lb.
AG2-SV14-B	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	408cc Vanguard OHV	47x22x28in.	390 lb.	325 lb.
AG2-SV14-BE [^]	16.4 @ 90	15.7 @ 175	4000 watts	2300 watts	3500 watts	408cc Vanguard OHV	47x22x28in.	390 lb.	325 lb.

*Equipped with 150-PSI maximum rated regulator. ⁺49 state engine. Not for sale in California. [^]Equipped with electric start – battery, box and cables not included.

ACCESSORIES:

PART NUMBER	DESCRIPTION	FITS MODELS
70-0357	Engine oil drain extension – 14-inch flexible drain hose makes oil changes clean and easy	Single stage models
70-0358	Engine oil drain extension – 14-inch flexible drain hose makes oil changes clean and easy	Two stage models
854-0093	Service truck mount kit – Includes four rubber isolators to reduce wear. Recommended for models mounted in service truck applications	Two stage portable & stationary models
AW-6000-1002	Equipment cover – Keeps your equipment clean, dry and looking like new	All models

OPTIONS:

PART NUMBER	DESCRIPTION	FITS MODELS
AX-0016	Battery, battery tray, box and 2-foot of cables – Attaches to engine side of unit	Electric start models
AX-0028	Lifting hook – For easier portability	Two stage portable & stationary models
AX-0063	Lifting hook – For easier portability	Base-mount models
AX-0068	Idle down – When activated it automatically throttles down engine to conserve fuel	Two stage Honda engine models with electric start
AX-0070	Battery tray, box and 2-foot of cables – Attaches to engine side of unit	Electric start models
AX-0075	Idle down – When activated it automatically throttles down engine to conserve fuel	Two stage Mi-T-M engine models with electric start
AX-0083	Idle down – When activated it automatically throttles down engine to conserve fuel	Vanguard engine models with electric start
IX-0055	Remote start/choke – 7-foot wire extension for key switch	Two stage Honda engine models with electric start
IX-0059	Remote start/choke – 7-foot wire extension for key switch, sealed cable	Two stage Honda engine models with electric start
IX-0060	Remote start/choke – 7-foot wire extension for key switch, sealed cable	Vanguard engine models with electric start
IX-0067	Remote start/choke – 7-foot wire extension for key switch, sealed cable	Two stage Mi-T-M engine models with electric start



NEMA 5-20R
125V



NEMA L6-20R
240V

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.