



**ROTARY
SCREW**

BULLET G

Rotary Screw Air Compressor

BIG ENOUGH TO HANDLE THE TOUGHEST JOBS...



SMALL ENOUGH TO BE VERSATILE AND LIGHTWEIGHT!

more air solutions at
BOSSair.com

BOSS[®]
engineered **AIR** systems

BULLET G

Rotary Screw Air Compressor - Skid Mount and Wheel Versions

COMPACT DESIGN

The BOSS® *Bullet G* is a compact, strategically designed system. It integrates all major components on a single frame, which is enclosed in a tough, weather-resistant canopy.

The *Bullet G* design provides output of up to 70cfm at 100psi.

Because it measures just 20" wide x 45" long x 30" high and only weighs 405lbs, (Air Only package) the *Bullet 2* can be set on any class truck with minimal effect on load capacity and visibility. It is narrow enough to fit into standard industrial gates and doorways, as well as service elevators for high rise or underground construction. The width of the *Bullet G* makes it ideal for mounting on top of a 20" wide service body compartments.

ROTARY SCREW DEPENDABILITY


The heart of the BOSS *Bullet G* compressor is the rotary screw air-end. Rotary screw compression is ideal for this application because it provides constant air flow and pressure, regardless of the amount of time it takes to get the job done. This eliminates the need for an air storage tank, there is no waiting for the system to "catch-up".




GENERATOR OPTION

The BOSS *Bullet G* now has the option of adding 6.0kW of AC power! You can get 70cfm @ 100psi or 6.0kW of power. Want both air and power at the same time? No problem, with our multi-functional design, you can get 30cfm @100psi and 6.0kW simultaneously.

Its unique design allows you to utilize the BOSS *Bullet G* just about anywhere. Featuring the most fuel efficient, quiet running and maintenance free package in its class.

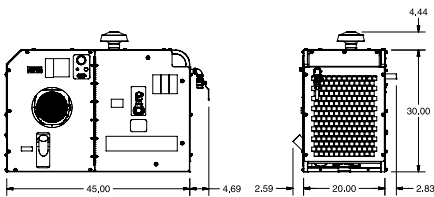

Bullet 2 Skid Mount (standard)

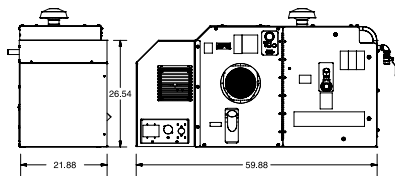

Bullet 2 + Generator (optional)

ENGINE

Type	Kohler 4-Cycle, V-Twin Cylinder, Overhead Valve, Air/Oil Cooled
Gasoline (EPA & C.A.R.B.)	Small Engine Certified
Kohler Warranty	2 years
Power (@3600 rpm)-hp	25
Displacement-cu. in3.	45.6 Cubic Inches (725cc)
Bore-in., Stroke-in.	3.27 x 2.64
Oil capacity (w/filter)-US qts	2
Battery Rating Volts	12v - 425CCA @ 32°F
Fuel tank capacity	5 gallons

COMPRESSOR

Type	Oil Flooded Rotary Screw
Rated Delivery	70cfm
Rating Operating Pressure	100psig*
Operating Pressure Range	80 - 115psig
Max. Operating Temp.	+100° F
Oil Sump Capacity	2.0 gallons
Total System Volume	2.5 gallons
Air Service Connection	One 3/4" NPT

* 55cfm @ 150psi optional.
Remote Start/Stop/Choke option available.

GENERATOR (Optional)

Type	Single-Phase synchronous self-regulated brushless 2-pole
Output	6kW - 50A @ 120V -60Hz

WEIGHT (DRY)

(Metrics in Parenthesis)

Skid Mounted	405lbs (183kg) Dry
Skid Mounted Dimensions	45" L x 20.0" W x 34" H
Generator Package	520lbs (236kg) Dry
Generator Package Dimensions	60" L x 21.8" W x 34" H

DISTRIBUTED BY:



BOSS INDUSTRIES, LLC.

1761 Genesis Drive LaPorte, IN 46350

Voice: (219) 324-7776 • (800) 635-6587 • Fax: (219) 324-7470

Electronic: www.bossair.com • email: sales@bossair.com

Specifications subject to change without notice.

©2018 Boss Industries, LLC. Printed In U.S.A. Bullet G. 500. 021218. BI