



REVISION HISTORY						
ZONE	REV	DESCRIPTION	ECN #	DATE	DWN	CHK
	02	REVISED AS PER ECN	1129957	1/12/2020	sxd0419	

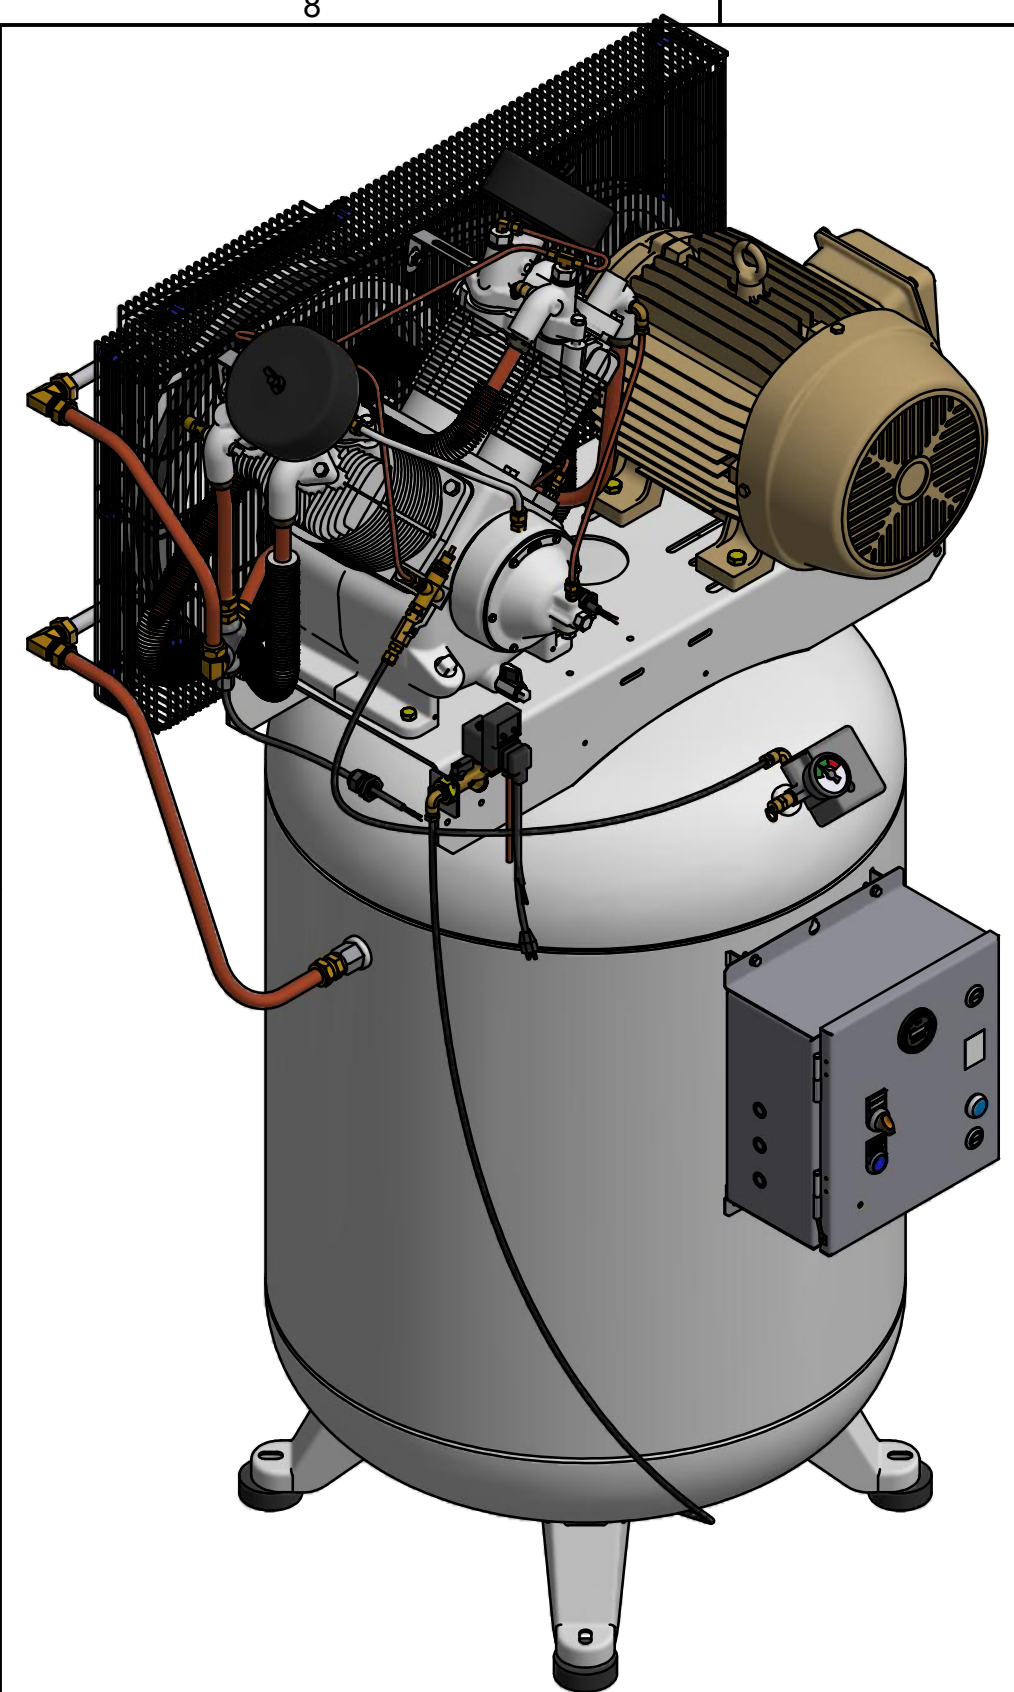

DUAL CONTROL PILOT VALVE WITH HEAD UNLOADERS (OPTIONAL)

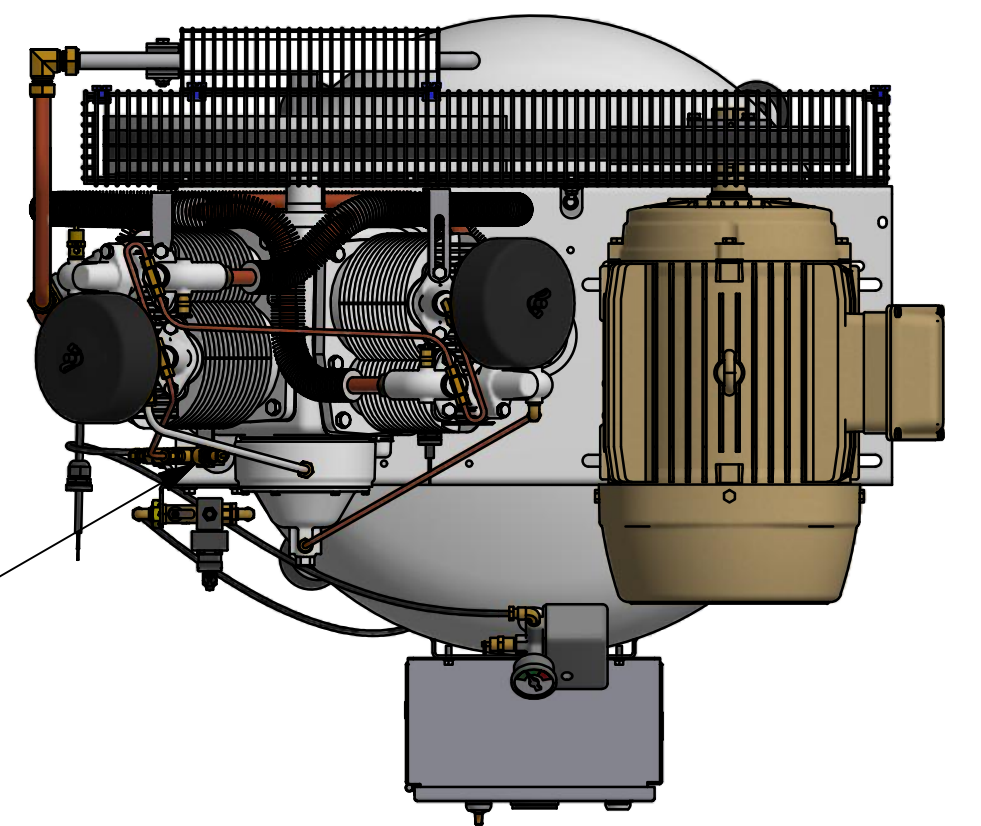

HIGH TEMPERATURE SWITCH (OPTIONAL)

ELECTRIC TANK DRAIN (OPTIONAL)

ASME PRESSURE RELIEF VALVE

HOUR METER (OPTIONAL)

TEST-OFF-AUTO SWITCH (OPTIONAL)

1/4" NPT MANUAL TANK DRAIN



LOW OIL STOP CONTROL (OPTIONAL)

PRESSURE GAUGE
PRESSURE SWITCH

3/4" NPT VALVE

4X HOLES
Ø.51 ISOLATOR
Ø.56 RECEIVER FOOT

Ø29.50 B.C.

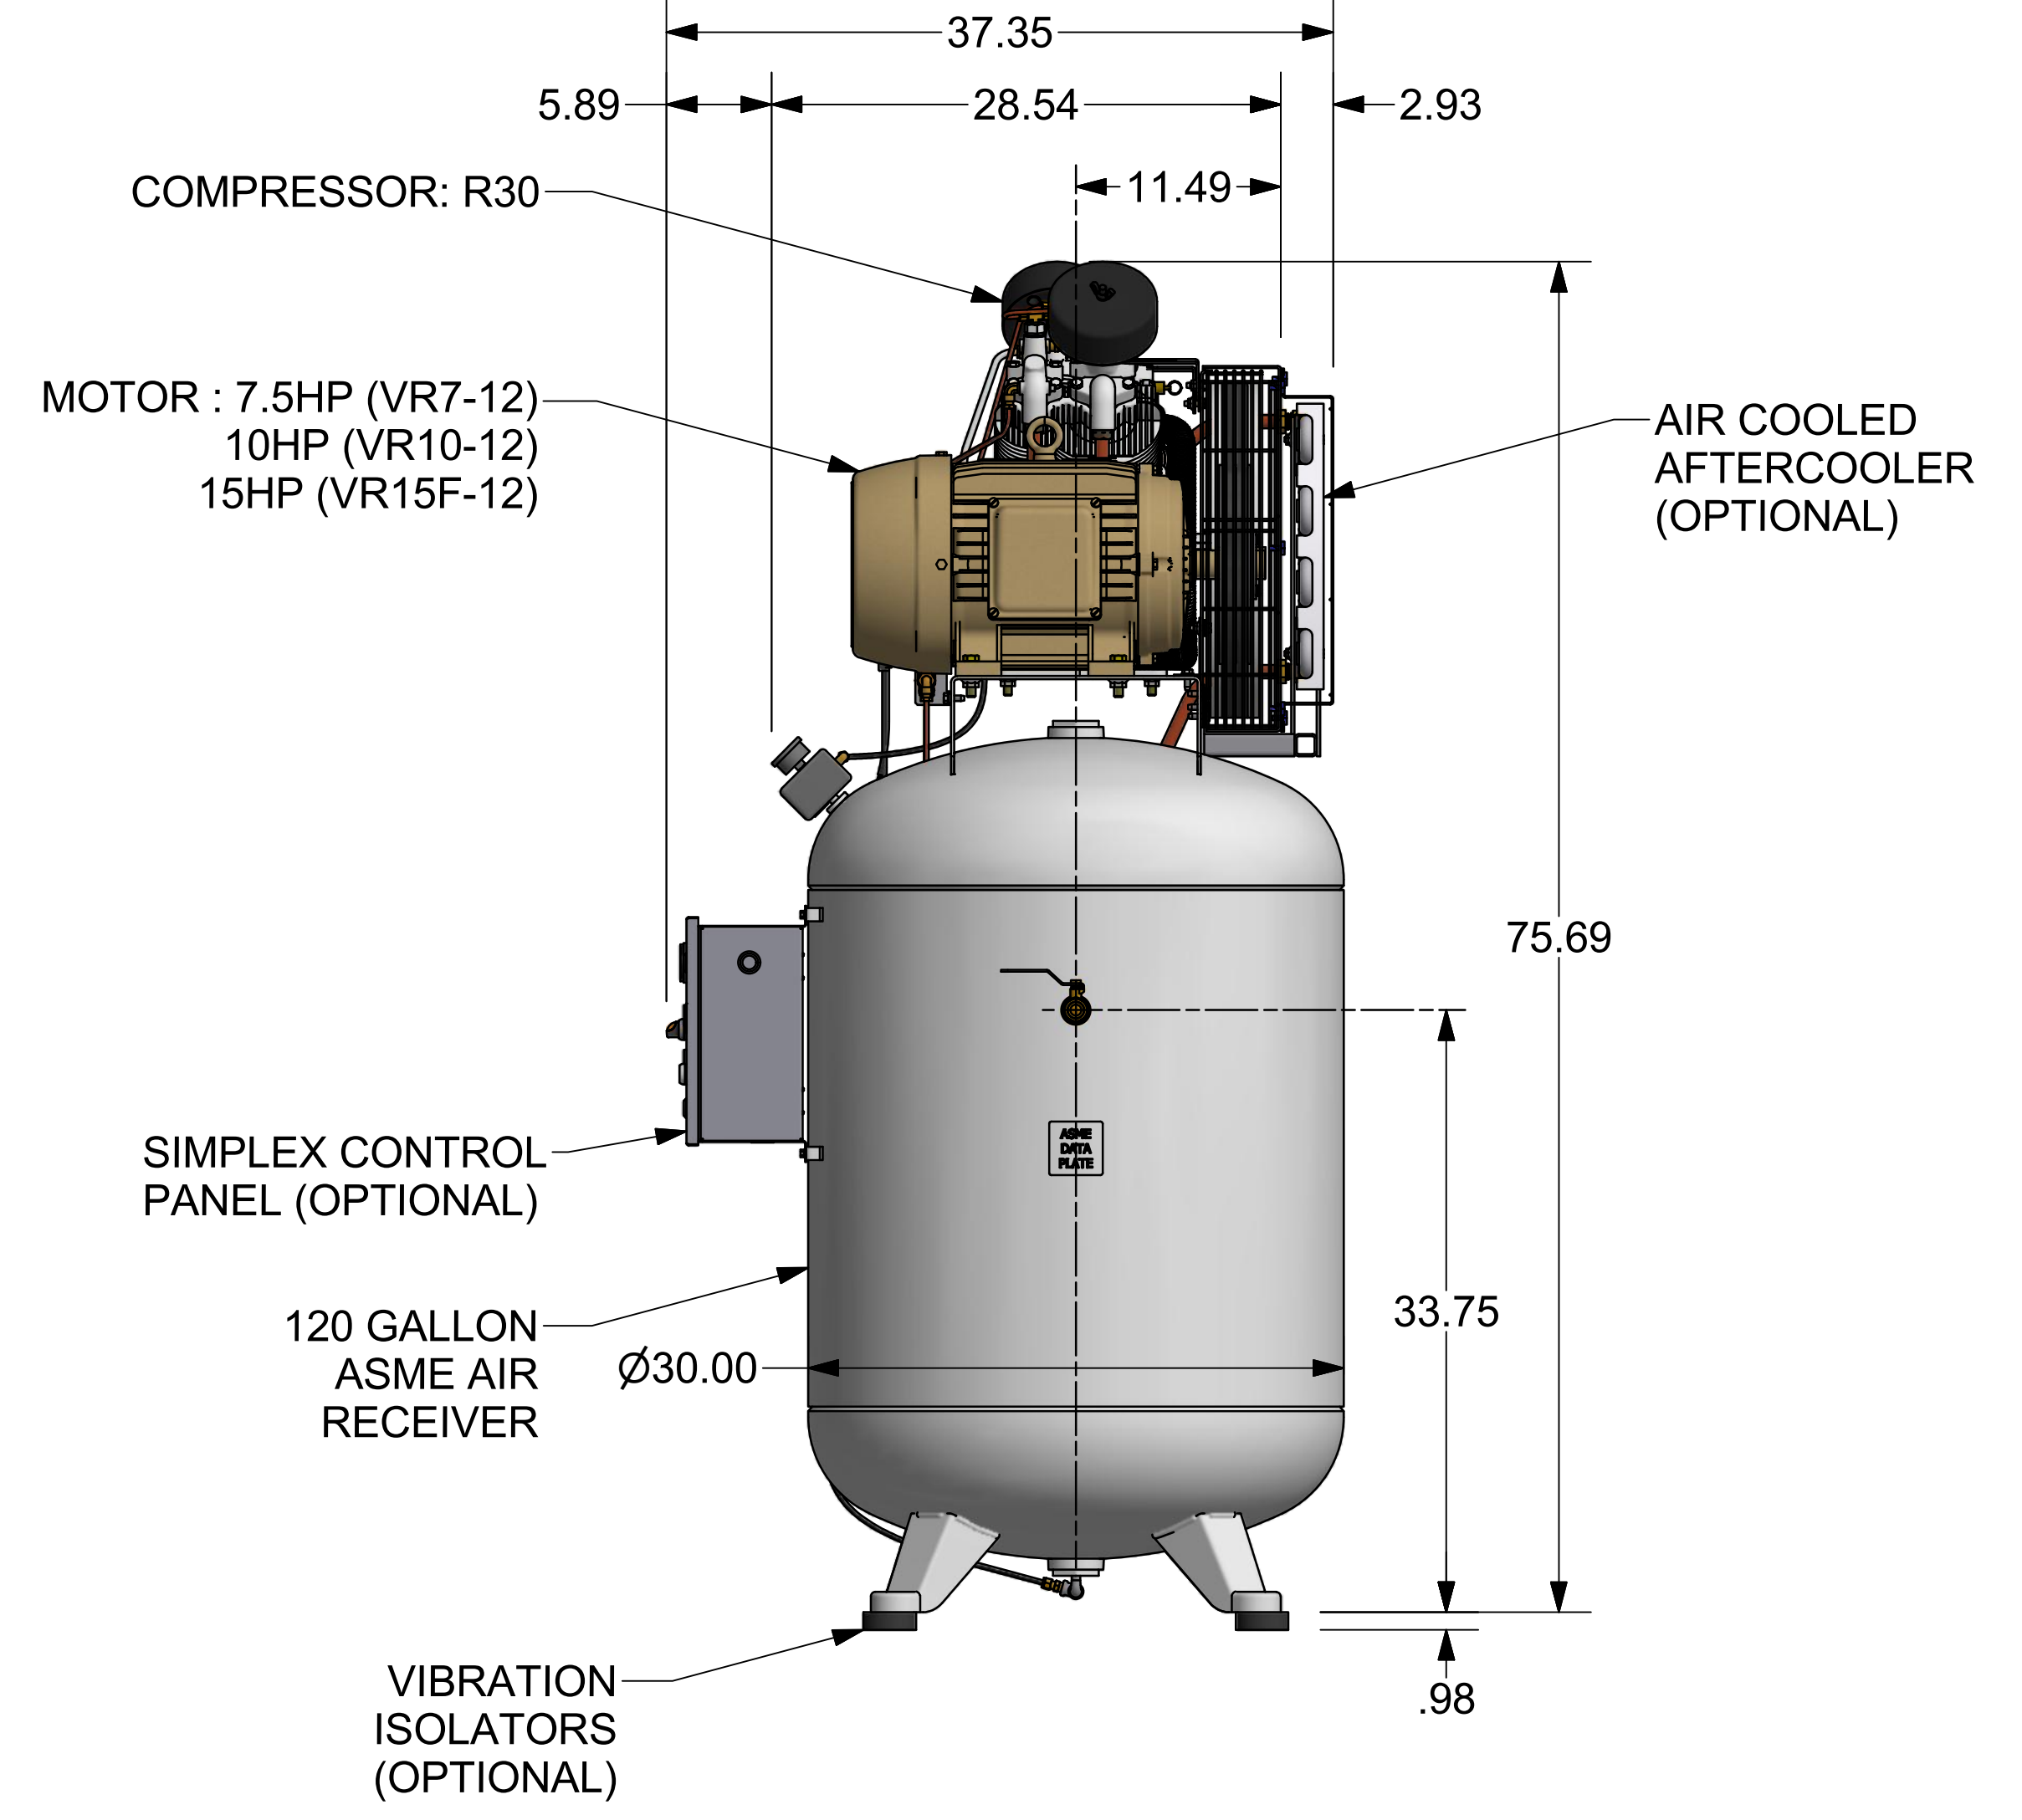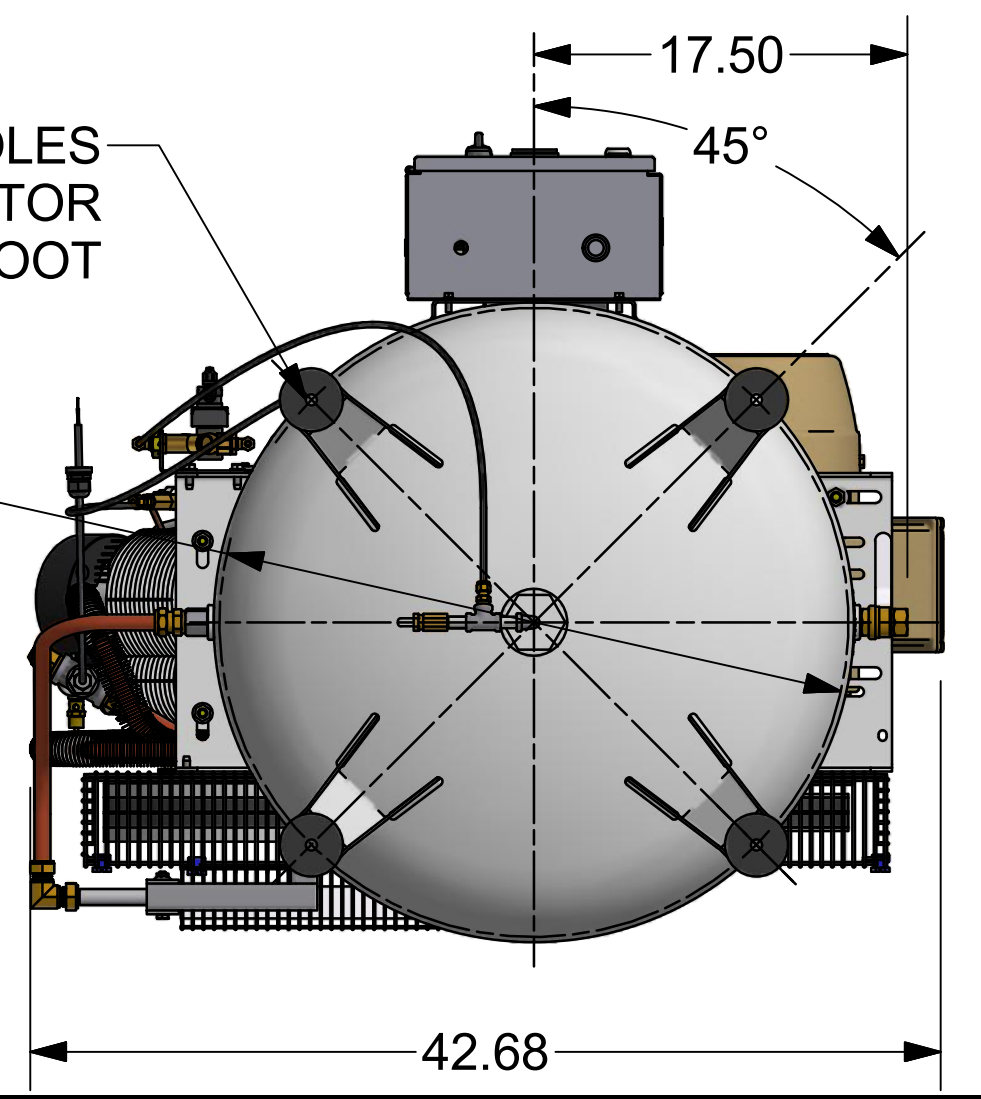

- NOTES:
- DO NOT SCALE DRAWING.
 - SPECIFICATIONS AND DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE OR OBLIGATION.
 - ALL DIMENSIONS ARE IN INCHES.

FINISH OF CHAMFERS AND FILLETS TO CONFORM TO ROUGHEST ADJACENT AREA.	CONFIDENTIAL - THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF GARDNER DENVER, INC. IT IS NOT FOR PUBLIC DISCLOSURE. POSSESSION OF THE INFORMATION DOES NOT CONVEY ANY RIGHT TO LOAN, SELL OR DISCLOSE THE INFORMATION. UNAUTHORIZED REPRODUCTION OR USE OF THE INFORMATION IS PROHIBITED. THIS DOCUMENT IS TO BE RETURNED TO GARDNER DENVER, INC. UPON THE COMPLETION OF THE PURPOSE FOR WHICH IT IS LOANED OR UPON REQUEST.
SURFACE ROUGHNESS MAXIMUM PER ASME B46.1. FULL THREAD DEPTHS ARE MINIMUM.	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DIMENSIONING AND TOLERANCING PER ASME Y14.5-2009 THREADS PER ASME B1.1 GAGING SYSTEM 21 U.O.S., ANSI B1.20.1 & B1.20.3
TOL. ON DECIMALS: .X = ± .05 TOL. ON DECIMALS: .XX = ± .02 TOL. ON DECIMALS: .XXX = ± AS SPECIFIED TOL. ON ANGLES: = ± 0'-30'	HEAT TREATMENT: 329CAS800 ENG. REF: 329CAS800
THIRD ANGLE PROJECTION	Gardner Denver Gardner Denver Inc. Quincy, IL.
	DESCRIPTION: 0800-OUTLINE-BARE UNIT OUTLINE-UNIT, 120GL ELECTRIC VR7-12, VR10-12, VR15F-12
DRAWN BY: kas1112 CHECKED BY: mrf0717	DATE: 9/29/2017 SCALE: 2/14/2018
	SIZE: D ENGR. APPROVAL: mrf0717 DWS. NO.: 415CAS800 REV: 02 SHEET: 1 OF 1