




GAS POWERED AIR COMPRESSOR/GENERATORS

G30+GEN

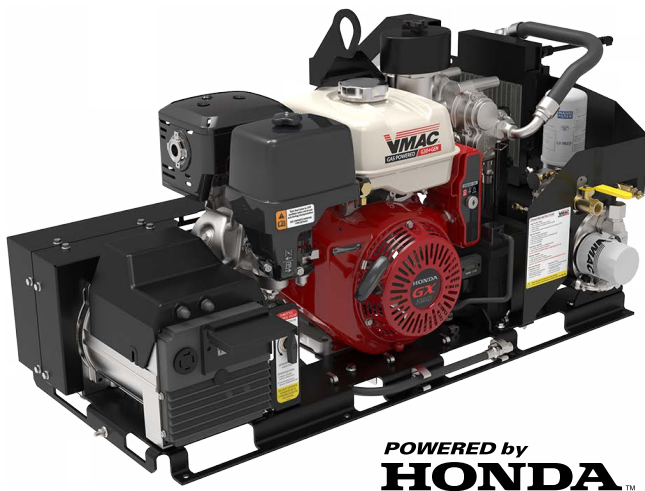

BENEFITS



25 CFM Continuous Air Power

VMAC's G30+GEN air compressor/generator includes a patented 25 CFM rotary screw air compressor designed to maintain max CFM 100% of the time, so operators don't have to wait for their air compressor to fill up a large air receiver tank. This maximizes air tool performance while providing maximum operator efficiency at the job site and eliminating downtime.



3600 W Continuous AC Generator

The G30+GEN is engineered and manufactured for mobile power. The 3600 W continuous AC output generator includes a 120V circuit with a GFCI duplex receptacle and a 240V circuit with a L14-20 twist lock. Operators will be able to power their electric tools, lighting, and other equipment wherever needed.



Turnkey System With Easy Installation

The G30+GEN is easy to install and ready for same-day use. The system includes all the necessary accessories, including a battery, electric starter, and lifting hook; simply add fuel and get straight to work.



Two Operating Modes

VMAC's air compressor/generator features a high idle and auto idle setting, ensuring the system's optimal performance for every task. A simple throttle control valve makes it easy to switch between Generator Mode (high idle) and Compressor Mode (auto idle) for air on demand.



40% Smaller & 36% Lighter


VMAC G30+GEN is engineered and manufactured for mobile applications. The G30+GEN is 40% smaller and 36% lighter than other gas powered air compressor/generator combos on the market today.

Industry-leading Reliability

VMAC G30+GEN air compressor/generators are proven to work in extreme cold climates across North America when ordered with an optional, factory-installed cold climate kit. Engines supplied by Honda come with an industry-leading 3-year warranty and VMAC rotary screw air compressors come with the industry's first Lifetime Warranty (Limited).



COMPONENTS

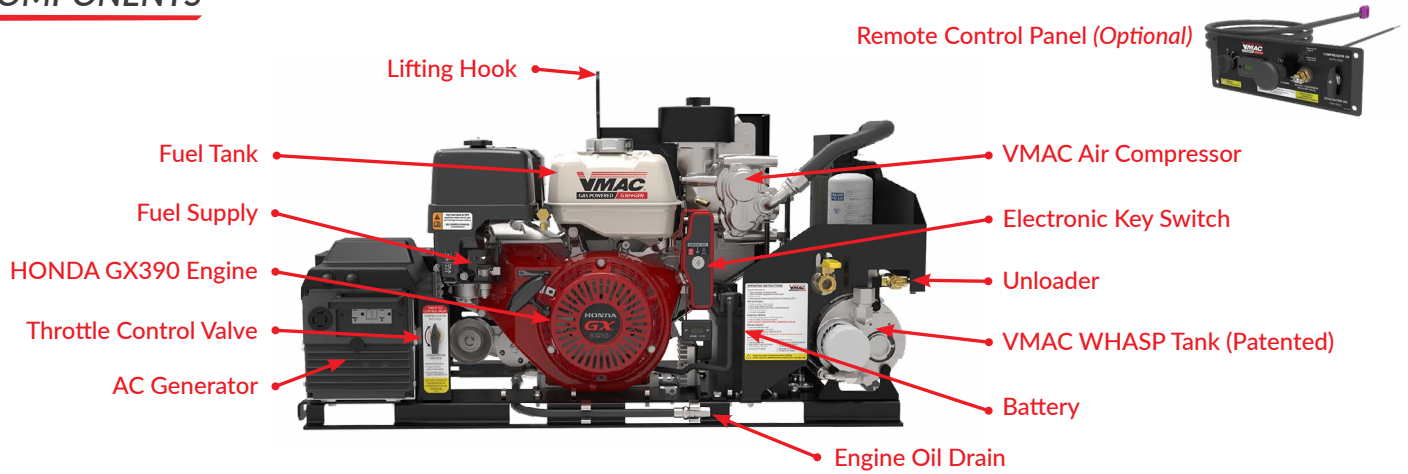

SPECIFICATIONS

Air Compressor Output	25 CFM @ 100 psi (150 psi max)	
Air Compressor	Belt-driven, 100% duty cycle, VMAC oil-injected rotary screw	
Generator Output	3600 W continuous AC output » 1 x 20 A, 120V, 60 Hz single-phase circuit with GFCI duplex receptacle » 1 x 20 A, 240V, 60 Hz single-phase circuit with L14-20 twist lock	
Generator	Single-phase brushed synchronous 2 pole generator with electronic automatic voltage regulation (AVR); helps protect sensitive electronics	
Engine	Honda GX390 air-cooled 4-stroke OHV with electric start; EPA certified; Honda approved application	
Weight (wet)	295 lb (134 kg)	
Dimensions	42.8" (l) x 21.4" (w) x 23.9" (h); 108.7 cm (l) x 54.4 cm (w) x 60.7 cm (h)	
Mounting Plate	40.5" (l) x 19.125" (w); 102.9 cm (l) x 48.6 cm (w)	
Decibels (dB) @ 20 feet (6.1 m)	67-81 dB	
Fuel Tank Capacity	1.6-gallons (6.1 L)	
Battery (included)	ACDelco 12V, 300 CCA, 360 CA	
Control System	» 2-speed throttle control with manual valve for Compressor Mode (auto idle) and Generator Mode (high idle) » Compressor mode for compressor operation responds to air demand » Generator mode for generator operation at high idle » Electronic key switch with hour meter » Unloader unloads compressor for generator operation; decreases engine load, lowers sound levels, reduces fuel use and engine wear	
Safety Features	Air Compressor » Compressor thermal protection circuit » Automatic rapid blow-down valve on tank » 200 psi pressure relief valve » Low engine oil pressure shutoff	Generator » 20 amp thermal breaker 120 Volt circuit » 20 amp thermal breaker 240 Volt circuit » 120 Volt GFCI duplex receptacle
Air Receiver Tank <i>(recommended for high duty cycle applications in hot climates)</i>	» 10-Gallon Air Receiver Tank w/ Mounting Feet » 6-Gallon Air Receiver Wing Tank	
Warranty	» Two years on all major components; VMAC air ends are covered by VMAC's Lifetime Warranty (Limited) » Honda engine is covered by Honda's 3-Year Warranty	

ACCESSORIES

A500244	Remote Control Panel	A700151	Filter Regulator Lubricator (FRL) 70 CFM
A500044	Cold Climate Kit	A300045	6-Gallon Air Receiver Wing Tank
A520004	Cold Climate Kit (Factory Installed)	A300047	10-Gallon Air Receiver Tank w/mounting feet
A700007	1/2" x 50" Hose Reel	A500181	800 W Power Inverter



1-877-912-6605
 sales@vmacair.com
 VMACAIR.com



VMAC Dealer Information